


Full Height Turnstile ST210



Application

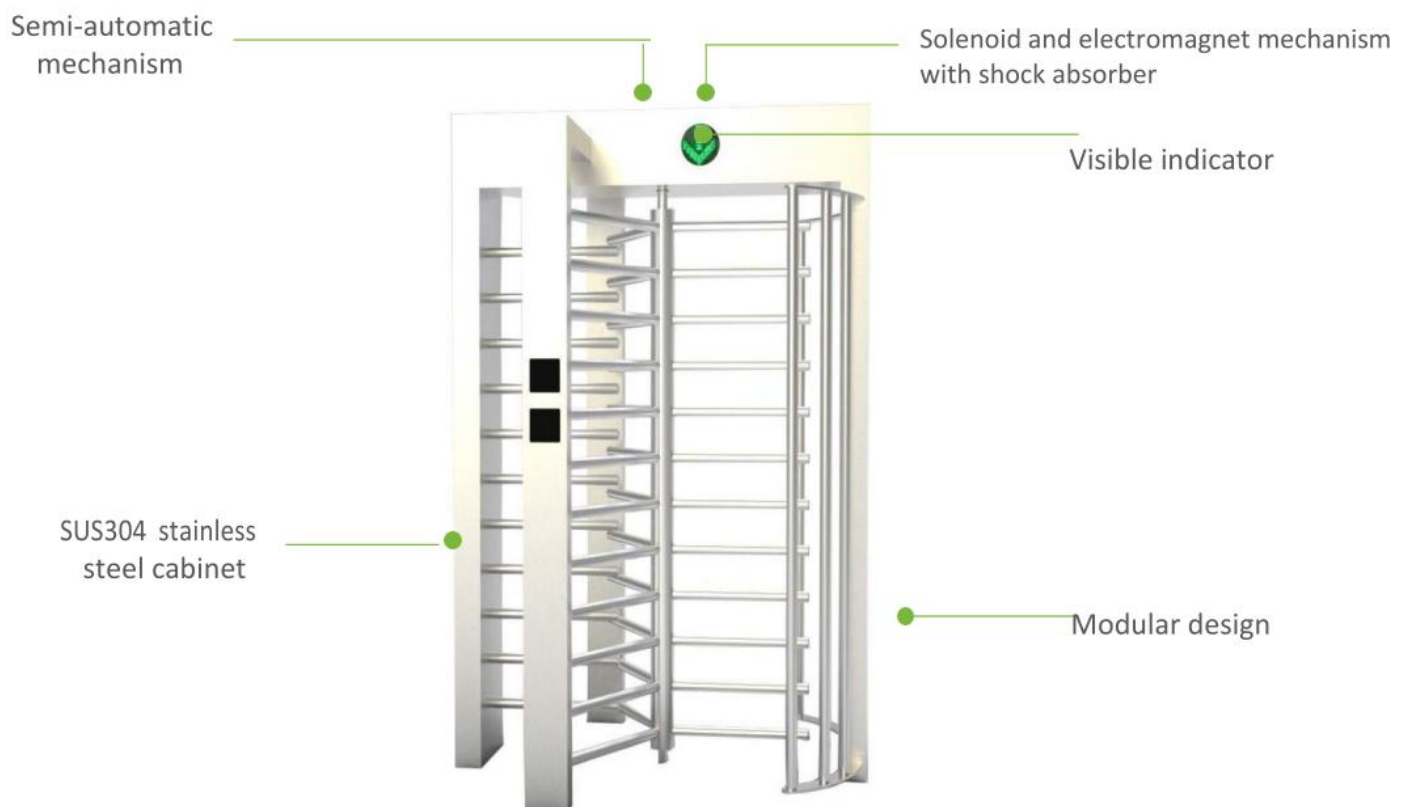

Industrial facility



Corporate security



Government security



Public transportation

Specifications

Power requirements	AC220V±10V, 110V±10V, 50/60Hz	
Working temperature	-28°C~60°C	
Working humidity	0%~95%	
Working environment	Indoor/Outdoor	
Speed of throughput	Person	Maximum 40/minute
	RFID	Maximum 30/minute
	Fingerprint	Maximum 25/minute
	Face /Vein	Maximum 15/minute
Lane width(mm)	550-620mm	
Dimension(mm)	L=1520 W=1280 H=2250	
Dimension with packing(mm)	2100x1150x1090&2220x630x630&1630x300x400	
LED indicator	Y	
Cabinet material	SUS304 Stainless Steel	
Barrier material	SUS304 Stainless Steel (thickness 1.5mm)	
Barrier movement	Rotating	
Emergency mode	Y	
Security level	High	
MCBF	5 million	
Ingress protection	IP54	
Options/Accessories	Counter, Remote Control,Access Control	
Drive Variant	Semi-auto	
Housing Thickness	1.2*1.5mm(Top*Housing)	
Rated Power	60W	
Input signal	12VDC / dry contact	
Weight	250 kg	

Dimensions (mm)

