


Mainboard

BLE Module PCB_BT

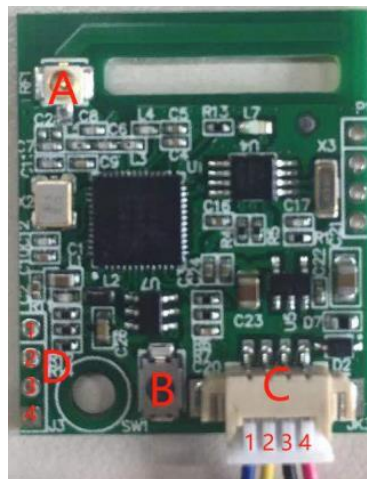

NO.	Description	Remark
A	bluetooth antenna interface (stand by)	When cooperating with the gateway, it depends on real situations.
B	Reset button	
C	Power point machine interface	From "1" to "4"
		1 Motor +
		2 Motor -
		3 Power -
		4 Power +
D	Reserved interface	From "1" to "4"
		1 IO1
		2 IO2
		3 IO3
		4 Power -

BLE	4.1BLE
Mobile phone system	Android 4.3/IOS7.0
Power Supply	4 AA
Low power alarm voltage	4.8V
Voltage	4.5~15V
Standby current	25 microamp
Working current	Less than 200 milliampere
Unlocking time	≈ 1.5 seconds
Operating temperature	-20~70 °C
Unlocking mode	App、 mechanical key
Output voltage	4.2V~14.7V

BLE	4.1BLE
Mobile phone system	Android 4.3/IOS7.0
Power Supply	4 AA
Low power alarm voltage	4.8V
Voltage	4.5~15V
Standby current	25 microamp
Working current	Less than 200 milliampere
Unlocking time	≈1.5 seconds
Operating temperature	-20~70 °C
Unlocking mode	App、mechanical key
Output voltage	4.2V~14.7V